

# SUBMITTAL DATA SHEET



CONDO PACK THRU THE WALL  
SINGLE PACKAGED VERTICAL UNIT



JOB NAME: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 PURCHASER: \_\_\_\_\_ ORDER NO: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 SUBMITTED TO: \_\_\_\_\_ FOR: \_\_\_\_\_  
 REF: \_\_\_\_\_  
 APPROVAL: \_\_\_\_\_  
 CONSTRUCTION: \_\_\_\_\_  
 SUBMITTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_  
 UNIT DESIGNATION: \_\_\_\_\_  
 SCHEDULE NO: \_\_\_\_\_ MODEL NO: \_\_\_\_\_

## PRODUCT DATA

### COOLING PERFORMANCE

Capacity: \_\_\_\_\_ BTU/h  
 EER: \_\_\_\_\_  
 Refrigerant: \_\_\_\_\_

### HEATING PERFORMANCE

Input Capacity: \_\_\_\_\_ BTU/h  
 Output Capacity: \_\_\_\_\_ BTU/h  
 AFUE: \_\_\_\_\_ %  
 Air Temp Rise: \_\_\_\_\_ °F

### SUPPLY AIR BLOWER PERFORMANCE

Total Supply Air: \_\_\_\_\_ CFM  
 Total External Static Pressure: \_\_\_\_\_ IWC  
 Motor Rating: \_\_\_\_\_ HP

### ELECTRICAL DATA

Power Supply: \_\_\_\_\_  
 Minimum Circuit Ampacity: \_\_\_\_\_ A  
 Maximum Overload Protective Device: \_\_\_\_\_ A

### UNIT WEIGHT

Unit Shipping Weight: \_\_\_\_\_ LBS

## DIMENSIONS AND CLEARANCES



### NOTE

ENGINEER / ARCHITECT TO CONSULT WITH NAPOLEON ENGINEERING TO DETERMINE BRACKET LOCATION FOR SETTING THE DESIRED DEPTH OF WALL SLEEVE INTO WALL.

### CLEARANCES

FRONT	0" (10" recommended)
RIGHT SIDE	2" MIN. (10" recommended)
LEFT SIDE	0"
BOTTOM	8" from the floor

\* If less than 10", servicing may be performed by opening the front door panels and the heating module may need to be removed in order to access the components. Space required for return air ducting must be considered.

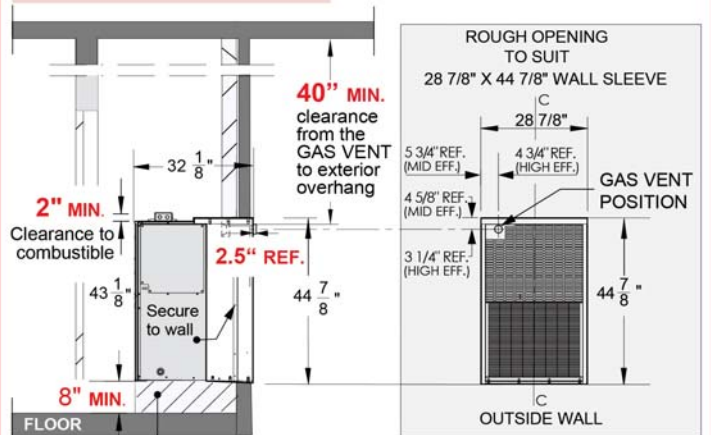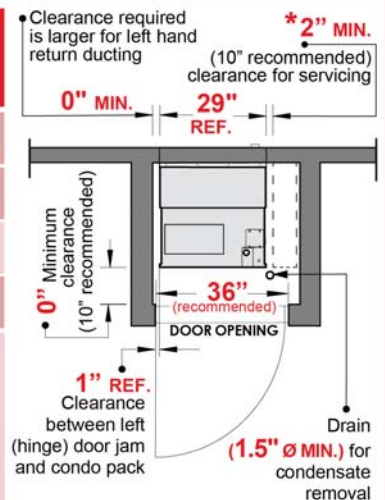

Fabricated wood or steel unit support